

PAWS

POWER ASSISTED WHEELCHAIR SYSTEM

Company/Customer ID:	P.O. Number:	Date:
Contact person:	Other delivery address/Company:	
Street address:	Street address:	
City and Post Code:	City and Post Code:	
TEL:	Remark:	
E-Mail:		

☐ REQUEST A QUOTE

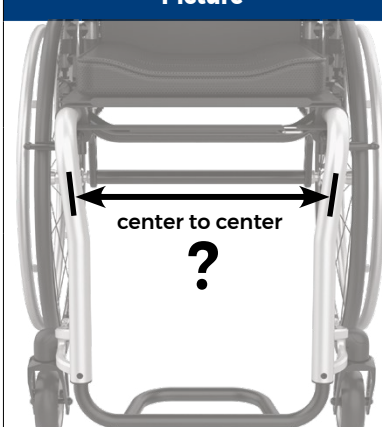
☐ PLACE AN ORDER

User Information:	Form of the front tubes:
User name as reference:	☐ ROUND
Wheelchair Brand/Model:	☐ OVAL
Approx user weight:	☐ KÜSCHALL K2
Front Tube Diameter:	☐ KÜSCHALL K1
Distance between front tubes (center to center):	☐ MEYRA FUSE R
REQUEST DELIVERY DATE:	☐ OFFCARR THEMIS
	OTHER

1. PAWS with standard center piece for mounting widths between 295-540 mm (default)

Models	Specifications	Item no.	Choose size and version	Qty
CITY 12"	- Motor: 350W Width of the center piece: 200 mm - By default incl. 107 mm width adjustment rods for fitting width 315-415mm - Battery: 48V, 11.6Ah (557Wh) - Light patterned tyre 12 1/2" x 2 1/4", black Alternative stroke length for auto lift /LONG ☐	RPI12MMS00	Manual/Manual ☐	
		RPI12AAS00	Auto/Auto ☐	
		RPI12AAT00	Auto/Auto Tetra ☐	
CITY 14"	- Motor: 400W Width of the center piece: 200 mm - By default incl. 107 mm width adjustment rods for fitting width 315-415mm - Battery: 48V, 11.6Ah (557Wh) - Block patterned tyre 3.00"- 8", black Alternative stroke length for auto lift /LONG ☐	RPI14MMS00	Manual/Manual ☐	
		RPI14AAS00	Auto/Auto ☐	
		RPI14AAT00	Auto/Auto Tetra ☐	
CRUISER 16"	- Motor: 500W Width of the center piece: 200 mm - By default incl. 107 mm width adjustment rods for fitting width 315-415mm - Battery: 48V, 11.6Ah (557Wh) - Block patterned tyre 16" x 3.0", black Alternative stroke length - short ☐	RPC16MMS00	Manual/Manual ☐	
		RPC16AAS00	Auto/Auto ☐	
		RPC16AAT00	Auto/Auto Tetra ☐	
TOURER 20" x 4" (FAT TYRE)	- Motor: 500W Width of the center piece: 200 mm - By default incl. 107 mm width adjustment rods for fitting width 315-415mm - Battery: 48V, 11.6Ah (557Wh) - Block patterned tyre 20" x 4", black Alternative stroke length - short ☐	RPT20MMS00	Manual/Manual ☐	
		RPT20AAS00	Auto/Auto ☐	
		RPT20AAT00	Auto/Auto Tetra ☐	
TOURER 20" x 2"	- Motor: 500W Width of the center piece: 200 mm - By default incl. 107 mm width adjustment rods for fitting width 315-415mm - Battery: 48V, 11.6Ah (557Wh) - Block patterned tyre 20" x 2.125", black Alternative stroke length - short ☐	RPT20MMS01	Manual/Manual ☐	
		RPT20AAS01	Auto/Auto ☐	
		RPT20AAT01	Auto/Auto Tetra ☐	
Any additional info / remark?				

1a. Available width adjustment rods for above PAWS with 200 mm center piece

Picture	Description		Optional
	107 mm width adjustment rods For wheelchairs with mounting point width: 315-415 mm Rods 107 mm: Left: EBC107L-BK /Right: EBC107R-BK	included	☐
	150 mm width adjustment rods For wheelchairs with mounting point width: 400-480 mm Rods 150 mm: Left: EBC150L-BK /Right: EBC150R-BK		☐
	190 mm width adjustment rods For wheelchairs with mounting point width: 480-540 mm Rods 190 mm: Left: EBC190L-BK /Right: EBC190R-BK		☐
	70 mm width adjustment rods (Special side bracket/clamp holder) For wheelchairs with mounting point width: 290-315 mm Rods 70 mm: EBC070-BK (same item for both sides, x2)		☐

Note:

The width must be measured from the center to the center of the front tubes as illustrated in the picture above. It should also be mounted and measured as high up on the front frame as possible and in the middle of a straight piece of at least 5-6 cm, where the clamps should be placed. Usually the measurement do not have to be 100% accurate, it is good enough with a +/- tolerance of 5-10 mm.

Any additional info / remark?

2. PAWS narrow center piece for mounting widths between 240-295 mm

Models	Specifications	Item no.	Choose size and version	Qty
CITY 12" 	• Motor: 350W • Width of the center piece: 150 mm • By default incl. 80 mm width adjustment rods for fitting width 265-295mm • Battery: 48V, 11.6Ah (557Wh) • Light patterned tyre 12 1/2" x 2 1/4", black Alternative stroke length for auto lift /LONG ☐	RPI12MMS15	Manual/Manual ☐	
		RPI12AAS15	Auto/Auto ☐	
		RPI12AAT15	Auto/Auto Tetra ☐	
CITY 14" 	• Motor: 400W • Width of the center piece: 150 mm • By default incl. 80 mm width adjustment rods for fitting width 265-295mm • Battery: 48V, 11.6Ah (557Wh) • Block patterned tyre 3.00"-8", black Alternative stroke length for auto lift /LONG ☐	RPI14MMS15	Manual/Manual ☐	
		RPI14AAS15	Auto/Auto ☐	
		RPI14AAT15	Auto/Auto Tetra ☐	
CRUISER 16" 	• Motor: 500W • Width of the center piece: 150 mm • By default incl. 80 mm width adjustment rods for fitting width 265-295mm • Battery: 48V, 11.6Ah (557Wh) • Block patterned tyre 16" x 3.0", black	RPC16MMS15	Manual/Manual ☐	
		RPC16AAS15	Auto/Auto ☐	
		RPC16AAT15	Auto/Auto Tetra ☐	
Any additional info / remark?				

2a. Available width adjustment rods for above PAWS with 150 mm center piece

Picture	Description		Optional
	80 mm width adjustment rods For wheelchairs with mounting point width: 265-340 mm Rods 80 mm: Left: EBC080L-BK /Right: EBC080R-BK	included	☐
	70 mm width adjustment rods (Special side bracket/clamp holder) For wheelchairs with mounting point width: 240-265 mm Rods 70 mm: EBC070-BK (same item for both sides, x2)		☐

Note:




The width must be measured from the center to the center of the front tubes as illustrated in the picture above. It should also be mounted and measured as high up on the front frame as possible and in the middle of a straight piece of at least 5-6 cm, where the clamps should be placed. Usually the measurement do not have to be 100% accurate, it is good enough with a +/- tolerance of 5-10 mm.

Any additional info / remark?


3. Speed settings

Gear	1	2	3	4	5	Reverse
Customer-specific gear and speed details						
Predefined speed	Yes please use my default setting profile					☐
Note: Always drive within your ability to control the device to a safe stop. Using/driving the device at uncontrollable speeds is the user's responsibility and the manufacturer/dealer will deny/refuse any responsibility of accidents or damages to third party.						
Any additional info / remark?						

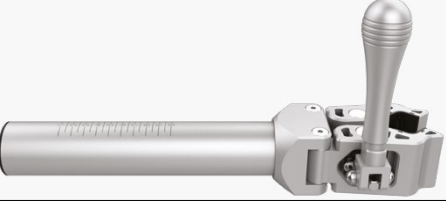


4. Auto clamps - Here you can select specific clamp version if necessary

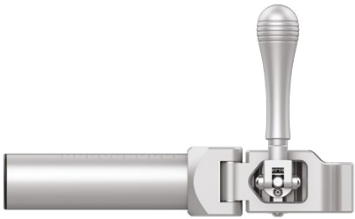
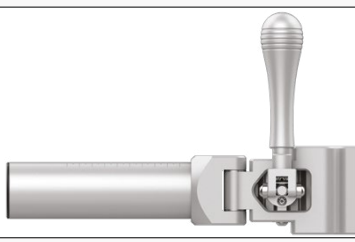
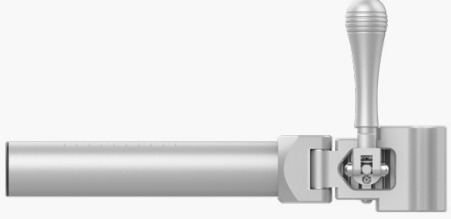
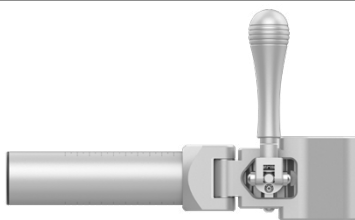
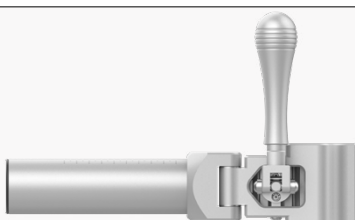
Pictures	Description		Optional
	C-STD - Auto clamp - default Item numbers: A: EBD01A-SI / B: EBD01B-SI	included	☐
	C-STD - Auto clamp - LONG , Item numbers: A: EBD02A-SI / B: EBD02B-SI		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-K2/MF - Auto clamp 50 mm made for KÜschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles Item numbers: A: EBD10A-SI / B: EBD10B-SI		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-K2/MF - Auto clamp 50 mm (LONG) made for KÜschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles Item numbers: A: EBD10C-SI / B: EBD10D-SI		☐
	C-OVL - Auto clamp 50 mm with bigger claws designed for oval tubes Item numbers: A: EBD07A-SI / B: EBD07B-SI		☐
	C-OVL - Auto clamp 50 mm (LONG) with bigger claws designed for oval tubes Item numbers: A: EBD07C-SI / B: EBD07D-SI		☐
	C-40 - Auto clamp with 40 mm high claws Item numbers: A: EBD04A-SI / B: EBD04B-SI		☐
	C-40 - Auto clamp (LONG) with 40 mm high claws Item numbers: A: EBD04C-SI / B: EBD04D-SI		☐
	C-70 - Auto clamp with 70 mm high claws Item numbers: A: EBD05A-SI / B: EBD05B-SI		☐
	C-70 - Auto clamp (LONG) with 70 mm high claws Item numbers: A: EBD09A-SI / B: EBD09B-SI		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-70 (K2/MF)- Auto clamp 70 mm made for KÜschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles Item numbers: A: EBD11A-SI / B: EBD11B-SI		☐
Any additional info / remark?			

4. Auto clamps - Here you can select specific clamp version if necessary

Pictures	Description		Optional
	C-70 (OVL)- Auto clamp 70 mm with bigger claws designed for oval tubes Item numbers: A: EBD01A-SI / B: EBD01B-SI		☐
	C-T - Auto clamp with cut-out designed for T-joint Item numbers: A: EBD03A-SI / B: EBD03B-SI		☐
	C-STD - Auto clamp - standard with bigger opening (up to 55 mm) for large round tubes over Ø32 mm Item numbers: A: EBD01C-SI / B: EBD01D-SI		☐
Any additional info / remark?			

5. Manual clamps - Here you can select specific clamp version if necessary

Pictures	Description		Optional
	C-STD - Manual clamp with vertical handle - default, w/o safety lock Item numbers: L: EBC00F-SL / R: EBC00E-SL		☐
	C-STD - Manual clamp with vertical handle and safety lock Item numbers: L: EBC00B-SL / R: EBC00A-SL	included	☐
	C-STD - Manual clamp with vertical handle - LONG, w/o safety lock Item numbers: L: EBC02K-SL / R: EBC02J-SL		☐
	C-STD - Manual clamp with vertical handle - LONG, Incl. safety lock Item numbers: L: EBC02B-SL / R: EBC02A-SL		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-K2/MF - Manual clamp 50 mm made for KÜschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles - w/o safety lock Item numbers: L: EBC15F-SL / R: EBC15E-SL		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-K2/MF - Manual clamp 50 mm (LONG) made for KÜschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles - w/o safety lock Item numbers: L: EBC19F-SL / R: EBC19E-SL		☐
	C-OVL - Manual clamp 50 mm with bigger claws designed for oval tubes - w/o safety lock Item numbers: L: EBC13F-SL / R: EBC13E-SL		☐
	C-OVL - Manual clamp 50 mm (LONG) with bigger claws designed for oval tubes - w/o safety lock Item numbers: L: EBC18F-SL / R: EBC18E-SL		☐

	C-40 - Manual clamp with vertical handle and 40 mm high claws - w/o safety lock Item numbers: L: EBC03F-SL / R: EBC03E-SL		☐
	C-40 - Manual clamp with vertical handle, 40 mm high claws and safety lock Item numbers: L: EBC04B-SL / R: EBC04A-SL		☐
	C-40 - Manual clamp (LONG) with 40 mm high claws - w/o safety lock Item numbers: L: EBC04H-SL / R: EBC04G-SL		☐
	C-70 - Manual clamp with vertical handle and 70 mm high claws - w/o safety lock Item numbers: L: EBC09F-SL / R: EBC09E-SL		☐
	C-70 - Manual clamp with vertical handle, 70 mm high claws and safety lock Item numbers: L: EBC08B-SL / R: EBC08A-SL		☐
	C-70 - Manual clamp (LONG) with 70 mm high claws - w/o safety lock Item numbers: L: EBC16F-SL / R: EBC16E-SL		☐
	 K2  K1  MEYRA FUSE R  OFFCARR THEMIS C-70 (K2/MF)- Manual clamp 70 mm made for Küschall K2, K1, Meyra FUSE R and OFFCARR Themis tube profiles - w/o safety lock Item numbers: L: EBC17F-SL / R: EBC17E-SL		☐
	C-70 (OVL)- Manual clamp 70 mm with bigger claws designed for oval tubes - w/o safety lock Item numbers: L: EBC14F-SL / R: EBC14E-SL		☐
	C-T - Manual clamp with vertical handle and cut-out for T-joint, w/o safety lock Item numbers: L: EBC05F-SL / R: EBC05E-SL		☐
	C-T - Manual clamp with vertical handle and cut-out for T-joint and safety lock Item numbers: L: EBC06B-SL / R: EBC06A-SL		☐
Any additional info / remark?			






5a. Longer spindle for manual clamps

Picture	Description		Optional
	Longer spindle (88 mm) for manual clamps required for tube diameter over Ø32 mm (for example: Schmicking wheelchairs) Item number: EBC131 (x 2pcs)		☐

6. Tube protectors

Picture	Description		Optional	Qty
	Tube protector for Panthera wheelchairs Item number for 1 piece: EBC02N (x 2pcs)		☐	
	Tube protector 65 mm for Ø22 mm tubes and clamps 50 mm Item number for 1 piece: EBC06N (x 2pcs)		☐	
	Tube protector 86 mm for Ø22 mm tubes and clamps 70 mm Item number for 1 piece: EBC06N-L (x 2pcs)		☐	
	Tube protector 65 mm for Ø25 mm tubes and clamps 50 mm Item number for 1 piece: EBC05N (x 2pcs)		☐	
	Tube protector 86 mm for Ø25 mm tubes and clamps 70 mm Item number for 1 piece: EBC05N-L (x 2pcs)		☐	
Important: Please note that you need 2 pcs per wheelchair)				

7. Clamp holders - Here you can select alternative clamp holder with

Pictures	Description		Optional
 	Standard clamp holder – black alu. Item numbers: Left: EBC11L / Right: EBC11R	Included	☐
 	Clamp holder with 25mm offset height – silver alu. Item numbers: Left: EBC08L / Right: EBC08R		☐
 	Clamp holder with flat angled socket for very narrow front tubes distance, down to 210 mm – black alu. Item numbers: Left: EBC12L / Right: EBC12R - Can only be used on round tubes (not oval, K1, K2 and FUSE R) - With them, the grip width can be reduced by 30-60 mm		☐
 	Standard clamp holder with angled socket for very narrow front tubes distance, down to 220 mm – black alu. Item numbers: Left: EBC11M / Right: EBC11N - Can only be used on round tubes (not oval, K1, K2 and FUSE R) - With them, the grip width can be reduced by 30-60 mm		☐
 	Offset clamp holder 25 mm with angled socket for very narrow front tubes distance, down to 220 mm – silver alu. Item numbers: Left: EBC08M / Right: EBC08N - Can only be used on round tubes (not oval, K1, K2 and FUSE R) - With them, the grip width can be reduced by 30-60 mm		☐

8. Side bracket - Here you can select alternative side bracket

Pictures	Description		Optional	Qty
	Standard side bracket for clamp holder Length: 105 mm Item number for 1 piece: EBC035W (x 2 pcs)	Included	☐	
	Medium long side bracket for clamp holder Length: 145 mm Item number for 1 piece: EBC045W (x 2 pcs)		☐	
	Long side bracket for clamp holder Length: 185 mm Item number for 1 piece: EBC055W (x 2 pcs)		☐	
	Side bracket in L shape for child wheelchairs and similar Length: 140 mm Item numbers - Left: EBC07L / Right: EBC07R		☐	

9. Handlebar Stem (optional)

Pictures	Description		Optional
	Standard length: 180-215 mm Item number: EBH00G	Included	☐
	Long: 210-265 mm - Designed for users who need to move the handlebar closer to them Item number: EBH01G		☐
	Extra long: 250-305 mm - Designed for users who need to move the handlebar closer to them Item number: EBH05G		☐
	Clamp for handlebar stem with bigger angle. May be necessary in specific situations. Item number: EBH200-A		☐
 EBH108-L  EBH109  EBH108 	Finger screw M6x40 mm for holding/angle adjustment Item number: EBH108-L		☐
	Adapted clamo for better fit and length adjustment Item number: EBH109		☐
	Finger screw M6x25 mm for length adjustment Item number: EBH108		☐

10. Soft spring for soft steering (optional)

Picture	Description		Optional
	35-40% softer spring for easier steering primarily intended for people with weak hands / arms and Tetra. Item number: EBF042-S		☐

11. Alternative handlebars

Pictures	Description		Optional
	Standard handlebar for PAWS. Ø22 x 48 cm, straight, black alu Item number: EBH002	included	☐
	Longer handlebar for PAWS. Ø22 x 55 cm, straight, black alu. Item number: EBH222		☐
	Alternative handlebar - W: 520 x Ø22/Ø19 mm - Barbore Ø25,4 mm Rise 30 mm - Backsweep 6° - Black and alu. Item number: EBH30R		☐
	Alternative handlebar - W: 520 x Ø22/Ø19 mm - Barbore Ø25,4 mm Rise 40 mm - Backsweep 10° - Black and alu. Item number: EBH40R		☐
	Alternative handlebar - W: 520 x Ø22/Ø17 mm - Barbore Ø25,4 mm Rise 50 mm - Backsweep 10° - Black and alu. Item number: EBH50R		☐
	Alternative handlebar - W: 600 x Ø22/Ø17 mm - Barbore Ø25,4 mm Rise 40 mm - Backsweep 38° - Black and alu. Item number: EBH301		☐
Any additional info / remark?			

12. Alternative throttle levers

Pictures	Description		Optional
	Right-hand throttle lever - default	included	
	Left-hand throttle lever Item number: EBE00M-LT		☐
	Thumb throttle for PAWS - fits both sides Item number: EBE00M		☐
Where you want it mounted ?			
		Left side: ☐	Right side: ☐

13. Throttle Grip Assist

Picture	Description		Optional
 Can be used for the right hand only	Throttle Grip Assist for standard handle - BLACK Item number: EBH218-BK		☐
	Throttle Grip Assist for standard handle - BLUE Item number: EBH218-BE		☐
	Throttle Grip Assist for standard handle - RED Item number: EBH218-RD		☐
	Throttle Grip Assist for standard handle - GREEN Item number: EBH218-CN		☐
	Throttle Grip Assist for standard handle - YELLOW Item number: EBH218-YW		☐

14. Hydraulic disc brakes for standard handles

Pictures	Description		Optional
 * Our brakes use Hydraulic Mineral Oil and the fittings are Shimano compatible	Complete set of hydraulic disc brake for 12"/14" PAWS - LEFT Prepared/filled with oil and ready for quick installation. Item number: EBH304-L		☐
	Complete set of hydraulic disc brake for 12"/14" PAWS - RIGHT Prepared/filled with oil and ready for quick installation. Item number: EBH304-R		☐
	Complete set of hydraulic disc brake for 16" PAWS - LEFT Prepared/filled with oil and ready for quick installation. Item number: EBH307-L		☐
	Complete set of hydraulic disc brake for 16" PAWS - RIGHT Prepared/filled with oil and ready for quick installation. Item number: EBH307-R		☐
	Complete set of hydraulic disc brake for 20" PAWS - LEFT Prepared/filled with oil and ready for quick installation. Item number: EBH303-L		☐
	Complete set of hydraulic disc brake for 20" PAWS - RIGHT Prepared/filled with oil and ready for quick installation. Item number: EBH303-R		☐

ONE-HAND brake - TWIN hydraulic disc brake

	TWIN hydraulic disc brake for PAWS - LEFT Complete set with 2 brake calipers etc. Item number: EBH03B-L		☐
	TWIN hydraulic disc brake for PAWS - RIGHT Complete set with 2 brake calipers etc. Item number: EBH03B-R		☐

15. Tetra hydraulic disc brakes

Picture	Description		Optional
	Tetra hydraulic disc brake for 12"/14" PAWS - LEFT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH04T		☐
	Tetra hydraulic disc brake for 16" PAWS - LEFT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH05T		☐
	Tetra hydraulic disc brake for 20" PAWS - LEFT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH03T		☐
	Tetra hydraulic disc brake for 12"/14" PAWS - RIGHT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH04T-R		☐
	Tetra hydraulic disc brake for 16" PAWS - RIGHT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH05T-R		☐
	Tetra hydraulic disc brake for 20" PAWS - RIGHT . Complete set prepared/filled with oil and ready for quick installation. Item number: EBH03T-R		☐
	Tetra left throttle needed for above right T. brakes Item number: EBE00M-T		☐

16. Alternative tyres and patterns

Pictures		Description		Optional
Default tyre pattern 	Alternative tyre pattern 	Available tyre for 12" PAWS 12 1/2" x 2.75" with off-road pattern, black Item number: 431210		☒
Default tyre pattern 3.00-8" 	Alternative tyre pattern 	Alternative tyre for 14" PAWS Off-road tyre 3.50"-8", black Item number: 440806		☐
Default tyre pattern 	Alternative tyre pattern 	Alternative tyre No. 1 for 16" PAWS Off-road tyre 3.00x16", black Item number: 431607		☐
Default tyre pattern 	Alternative tyre pattern 	Alternative tyre No. 2 for 16" PAWS Cross tyre 80/100-12", black Item number: 431296		☐
Default tyre pattern 	Alternative tyre pattern 	Alternative tyre No. 1 for 20"x4" PAWS Off-road tyre 3.50"x 16", (100-507), black Item number: 43200C		☐
Default tyre pattern 	Alternative tyre pattern 	Alternative tyre No. 2 for 20"x4" PAWS Off-road tyre 20"x 4", (100-507), INNOVA, black Item number: 432009		☐
Info: The standard tyre will be shipped to you together with PAWS				

17. Dual battery holder

Picture	Description		Optional
	Dual battery holder (without battery) Item number: EBH141		☐

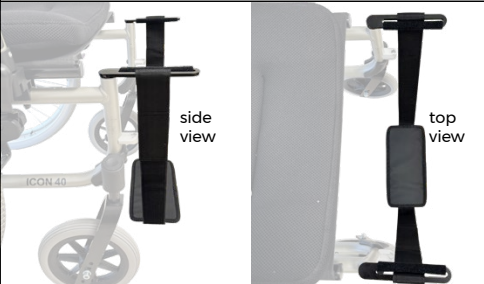
18. Support legs - horizontal

Pictures	Description		Optional
	Standard support legs - Vertical	Included	☐
 	Foldable support legs for 16" PAWS designed for mounting on the front fork and off-road driving. Item number: EBL01CD		☐
	Foldable support legs for 20" PAWS designed for mounting on the front fork and off-road driving. Item number: EBL01EF		☐
Info: Please note that the standard support legs will be shipped to you together with PAWS			

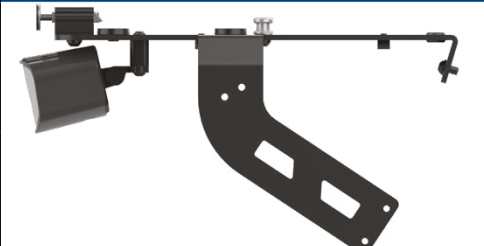
19. Foot rest for PAWS

Picture	Description		Optional
	Foot rest for 12"/14" PAWS Only for version with manual lift Item number: EBL01W This item cannot be preassembled from our side because it takes up too much space in the box		☐
	Foot rest for 12"/14" PAWS Only for version with Auto lift Item number: EBL02W This item cannot be preassembled from our side because it takes up too much space in the box		☐
	Foot rest for 16" PAWS Fits both versions Item number: EBL00W This item cannot be preassembled from our side because it takes up too much space in the box		☐
	Foot rest for 20" PAWS Fits both versions Item number: EBL03W This item cannot be preassembled from our side because it takes up too much space in the box		☐
Info: Please note that the standard support legs will be shipped to you together with PAWS			

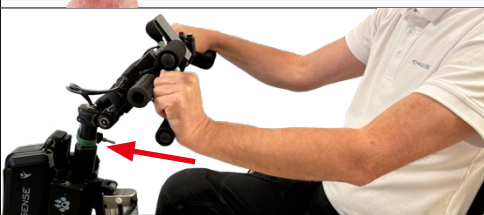
Lightweight foot rest

	Lightweight compact foot rest for short-term use when using PAWS - for wheelchairs with removable leg rests. Item number: R02988H		☐
--	--	--	-----------------------

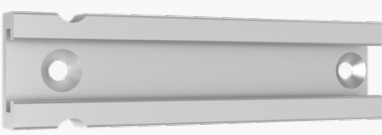
20. Alternative bag holder for PAWS

Picture	Description		Optional
	Platform holder for wire basket for 16" PAWS Item number: EBE00V-B		☐
	Platform holder for wire basket for 20" PAWS Item number: EBE00V-A		☐

21. Current customization options for Tetra users

Pictures	Description		Optional
	Standard tetra handles - horizontal Item number (set of 2 pcs): EBH00L	Included	
	Vertical Tetra handles Item number for vertical hand grips (set of 2 pcs): EBH00L-V		☐
	Tetra One-Handed Control for left hand - Horizontal handles **Only as the idea of a possible solution out there		☐
	Tetra One-Handed Control for left hand - Vertical handle **Only as the idea of a possible solution out there		☐
	PUSH TO BRAKE - See the picture on the left. In this way the Tetra handles can be also set to work as push to brake		☐
Any additional info / remark?			

22. Other accessories

Pictures	Description		Optional	Qty
	Complete bag incl. holder and bracket for City 12" and 14" Item number: EBH173 * For use with a double battery holder, it is necessary to use a 25 mm longer arm		☐	
	Bag and holder for Cruiser 16" and Tourer 20" (new version) Item number: EBH178 * For use with a double battery holder, it is necessary to use a 25 mm longer arm		☐	
	Wire basket and bag for Cruiser 16" and Tourer 20" (can only be used with the platform holder) Item number: EBH086-A		☐	
	Weights for PAWS that provide optimal traction in demanding situations. There is approx. 10 kg in total (2 x 5 kg) which can be reduced to 7.5 or 5 kg. Fits all PAWS sizes and types with standard support legs only Item number: EBF00E-A		☐	
	Distance blocks and longer bolts for mounting under the weight holders on PAWS with platform holder for wire basket. Item number: EBF123DBS		☐	
	Longer rail for weights mounting - required for use with horizontal support legs. Item number: EBF123-L		☐	
	Transport wheels for PAWS handlebar for easier loading in and out of the car. Version for fitting outside the hand grips set of 2 pcs . Item number: EBH00Y-A		☐	
	Transport wheels for PAWS handlebar for easier loading in and out of the car. Version for fitting into the handlebar tube - set of 2 pcs. Item number: EBH00Y		☐	
	Hill-start Assist Control (HAC) Item number: EBH600		☐	
	Phone holder 1 - black aluminium, 360 degree rotation, width range 60-95 mm, thickness of the phone max 11 mm Item number: EBH220		☐	

	Phone holder 2 – black aluminium, 360 degree rotation, width range 60-100 mm, thickness of the phone max 12 mm Item number: EBH221		☐	
	Rear View Mirror incl. LED lamp - set of 2 pcs, left and right Item number: EBH00N		☐	
	Rear view mirror Ø100 mm for the left or right side Fits tubes with at least Ø19 mm internal diameter Item number: EBH01B		☐	
	 Bottle holder 1 - Easy to install and very adjustable. Suitable for installation on the handlebar, handlebar stem or steering column. Item number: EBH225-A		☐	
	 Cup/Bottle holder 2 - Easy to install and very adjustable. Suitable for installation on the handle bar, handlebar stem or steering column. Item number: EBH225-B		☐	
	Smart tyre inflator Item number EBE01D		☐	
	Airsafe battery 48V, 5,8 Ah Item number: EBB0048B-A		☐	
	Spare battery pack 48V, 11,6 Ah Item number: EBB0048-A		☐	
	Charger for PAWS battery Item number: EBBC048		☐	
	Charging station for easy connection and charging of the PAWS battery Item number: EBX120DS		☐	
	Alternative larger wheel for support legs, 3" Ø80 x 24 mm, Ø8 x 24 mm hub Item number: 140396		☐	

FAT WHEELS FOR WHEELCHAIRS

OFF-ROAD wheelchair wheels are ideal for comfortable and safe driving with your PAWS (wheelchair add-on) especially on bumpy and soft terrain, or wherever you want.

Stylish MAG wheel 24"x1.75" suitable for driving with PAWS

Picture	Description		Optional	Qty
	TYRE: 24"x1.75" with city pattern, black		With ø12 mm bearings	
	RIM: 507 x 27 mm, black alu.			
	SPOKES: 5 solid spokes, black			
	HUB: Integrated 48/60 mm, offset, black		264EX8-12	
	PUSHRIM: Included (black alu. with 6 splices)			
	OUTSIDE DIAMETER: ca. 600 x 40 mm			
	WEIGHT (pair): 5 kg		With ø1/2"/12.7 mm bearings	
	ITEM NUMBER for 12 mm wheel set: 264EX8-12			
	ITEM NUMBER for ø1/2" wheel set: 264EX8			

FATBOY wheel 20"x4.0" with Chaoyang tyre

Picture	Description		Optional	Qty
	TYRE: Chaoyang, Sand Storm 20"x4.0", black		With ø12 mm bearings	
	RIM: 406 x 80 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black ø2.3 mm			
	HUB: High flange 79/90 mm, offset, black		26F006SETM	
	PUSHRIM: Not included			
	OUTSIDE DIAMETER: ca. 571 x 97 mm			
	WEIGHT (pair): 5.6 kg		With ø1/2"/12.7 mm bearings	
	ITEM NUMBER for 12 mm wheel set: 26F006SETM			
	ITEM NUMBER for ø1/2" wheel set: 26F006SET			
Add pushrim? Item no.: 3420E5				

FATBOY wheel 20"x4.0" with CST BFT tyre

Picture	Description		Optional	Qty
	TYRE: CST BFT 20"x4.0", 100-406 mm, black		With ø12 mm bearings	
	RIM: 406 x 80 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black ø2.3 mm			
	HUB: High flange 79/90 mm, offset, black		26F005SETM	
	PUSHRIM: Not included			
	OUTSIDE DIAMETER: ca. 565 x 96 mm			
	WEIGHT (pair): 5.1 kg		With ø1/2"/12.7 mm bearings	
	ITEM NUMBER for 12 mm wheel set: 26F005SETM			
	ITEM NUMBER for ø1/2" wheel set: 26F005SET			
Add pushrim? Item no.: 3420E5				

FATMAN wheel 24"×2.35" with Schwalbe Crazy Bob tyre

Picture	Description		Optional	Qty
	TYRE: Schwalbe Crazy Bob 24"×2.35", black		With ø12 mm bearings  26F411SETM	
	RIM: 507 x 80 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black Ø2.3 mm			
	HUB: High flange 79/90 mm, offset, black			
	PUSHRIM: Included (black alu.with 6 splices)			
	OUTSIDE DIAMETER: ca. 625 x 78 mm		With ø1/2"/12.7 mm bearings  26F411SET	
	WEIGHT (pair): 6.1 kg			
	ITEM NUMBER for 12 mm wheel set: 26F411SETM			
	ITEM NUMBER for ø1/2" wheel set: 26F411SET			

EASY RIDER wheel 24"×2" with Schwalbe Big Apple tyre

Picture	Description		Optional	Qty
	TYRE: Schwalbe Big Apple 24"×2", black		With ø12 mm bearings  26F413SETM	
	RIM: 507 x 57 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black Ø2.3 mm			
	HUB: High flange 53/64 mm, offset, black			
	PUSHRIM: Included (black alu.with 6 splices)		With ø1/2"/12.7 mm bearings  26F413SET	
	OUTSIDE DIAMETER: ca. 610 x 57 mm			
	WEIGHT (pair): 4.8 kg			
	ITEM NUMBER for 12 mm wheel set: 26F413SETM			
	ITEM NUMBER for ø1/2" wheel set: 26F413SET			

EASY RIDER wheel 24"×2" with Schwalbe SMART SAM tyre

Picture	Description		Optional	Qty
	TYRE: Schwalbe SMART SAM 24"×2", black		With ø12 mm bearings  26F414SETM	
	RIM: 507 x 57 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black Ø2.3 mm			
	HUB: High flange 53/64 mm, offset, black			
	PUSHRIM: Included (black alu. with 6 splices)		With ø1/2"/12.7 mm bearings  26F414SET	
	OUTSIDE DIAMETER: ca. 615 x 60 mm			
	WEIGHT (pair): 4.7 kg			
	ITEM NUMBER for 12 mm wheel set: 26F414SETM			
	ITEM NUMBER for ø1/2" wheel set: 26F414SET			

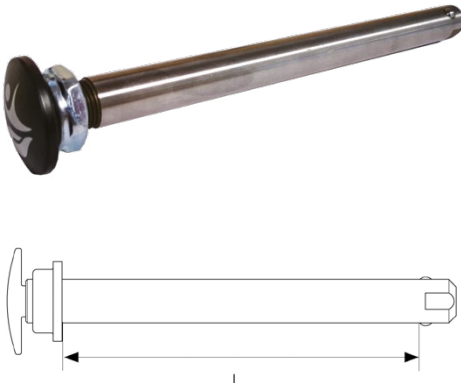
FLEX RIDER wheel 24"x2.35" with Schwalbe Crazy Bob tyre

Picture	Description		Optional	Qty
	TYRE: Schwalbe Crazy Bob 24"x 2.35", black		With Ø12 mm bearings  26F417SETM	
	RIM: 507 x 57 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black Ø2.3 mm			
	HUB: High flange 53/64 mm, offset, black		With Ø1/2"/12.7 mm bearings  26F417SET	
	PUSHRIM: Included (black alu.with 6 splices)			
	OUTSIDE DIAMETER: ca. 628 x 67 mm			
	WEIGHT (pair): 5.8 kg			
	ITEM NUMBER for 12 mm wheel set: 26F417SETM			
	ITEM NUMBER for Ø1/2" wheel set: 26F417SET			

FLEX RIDER wheel 24"x2.35" with Schwalbe SMART SAM tyre

Picture	Description		Optional	Qty
	TYRE: Schwalbe SMART SAM 24"x2.35", black		With Ø12 mm bearings  26F416SETM	
	RIM: 507 x 57 mm, black alu.			
	SPOKES: 36 pcs, 2 cross, black Ø2.3 mm			
	HUB: High flange 53/64 mm, offset, black		With Ø1/2"/12.7 mm bearings  26F417SET	
	PUSHRIM: Included (black alu. with 6 splices)			
	OUTSIDE DIAMETER: ca. 625 x 64 mm			
	WEIGHT (pair): 5 kg			
	ITEM NUMBER for 12 mm wheel set: 26F416SETM			
	ITEM NUMBER for Ø1/2" wheel set: 26F416SET			

QR-Axles for above FAT wheels

Picture	Description		Item numbers			Optional	Qty	
	QR-Axles 99 m release button - or MAG whee	lu	Ø12 mm	6180M1				
			Ø½"/12.7 mm	6181M1				
	QR-Axles 108 release button - for MAG whe	alu	Ø12 mm	6180M2				
			Ø½"/12.7 mm	6181M2				
	QR-Axles 130 release button - for wheels wi	alu	Ø12 mm	6180E2				
		m	Ø½"/12.7 mm	6183E5				
	QR-Axles 140 release button - for wheels wi	alu	Ø12 mm	6180E3				
		m	Ø½"/12.7 mm	6183E1				
	QR-Axles 145 release button - for wheels wi	alu	Ø12 mm	6180E4				
		m	Ø½"/12.7 mm	6183D8				
	QR-Axles 150 release button - for wheels wi	alu	Ø12 mm	6180E5				
		m	Ø½"/12.7 mm	6183D9				

QR-Axles for above FAT wheels - continued

Picture	Description	Item numbers			Optional	Qty
 	QR-Axles 104 release button - for wheels w	alu	Ø12 mm	618089L	☐	
		mm	Ø½"/12.7 mm	6183E2	☐	
	QR-Axles 114 m release button - for wheels w	alu	Ø12 mm	6180E1	☐	
		mm	Ø½"/12.7 mm	6183E3	☐	

Distance bushings for placement between the FAT wheel and bushing

Picture	Description		Optional	Qty
  	Distance bushing Ø1/2"x 6mm, galvanized steel Item number: 1942C3		☐	
	Distance bushing Ø1/2"x 9mm, galvanized steel Item number: 1942C4		☐	
	Distance bushing Ø1/2"x 12mm, galvanized steel Item number: 1942C5		☐	

Other important information for that order (copy of the mail etc.)

Date

Customer Signature